

# スリーブコア SLEEVE CORE / GRI




## 非分割タイプのスリーブコア Non-split sleeve cores

材 料

Material


- ソフトフェライト
- Soft ferrite

単位 / Unit: mm



品番 Part No.	A	B	C	インピーダンス※Ω/100MHz (1ターン) Impedance*Ω/100MHz (1 turn)
GRI-3-4-1	3	1	4	≧ 25
GRI-3.5-3.5-1.2	3.5	1.2	3.5	≧ 25
GRI-3.5-7-1.2	3.5	1.2	7	≧ 40
GRI-4-5-1.5	4	1.5	5	≧ 30
GRI-11-18-5	11	5	18.5	≧ 85
GRI-11-20-5	11	5	20	≧ 90
GRI-11-25-5	11	5	25	≧ 105
GRI-12-16-8.5	12	8.5	16	≧ 35
GRI-12.3-20-7	12.3	7	20	≧ 70
GRI-14-28-6	14.3	6.3	28.6	≧ 130
GRI-16-20-7	16	7	20	≧ 95
GRI-16-28-7	16	7	28	≧ 130
GRI-16-28-8	16	8	28	≧ 115
GRI-16-28-9	16	9	28	≧ 95
GRI-17.5-28.5-10.7	17.5	10.7	28.5	≧ 85
GRI-18-28-10	18	10	28	≧ 100
GRI-26-28-13	26	13	28	≧ 120

### インピーダンス周波数特性 Impedance vs frequency

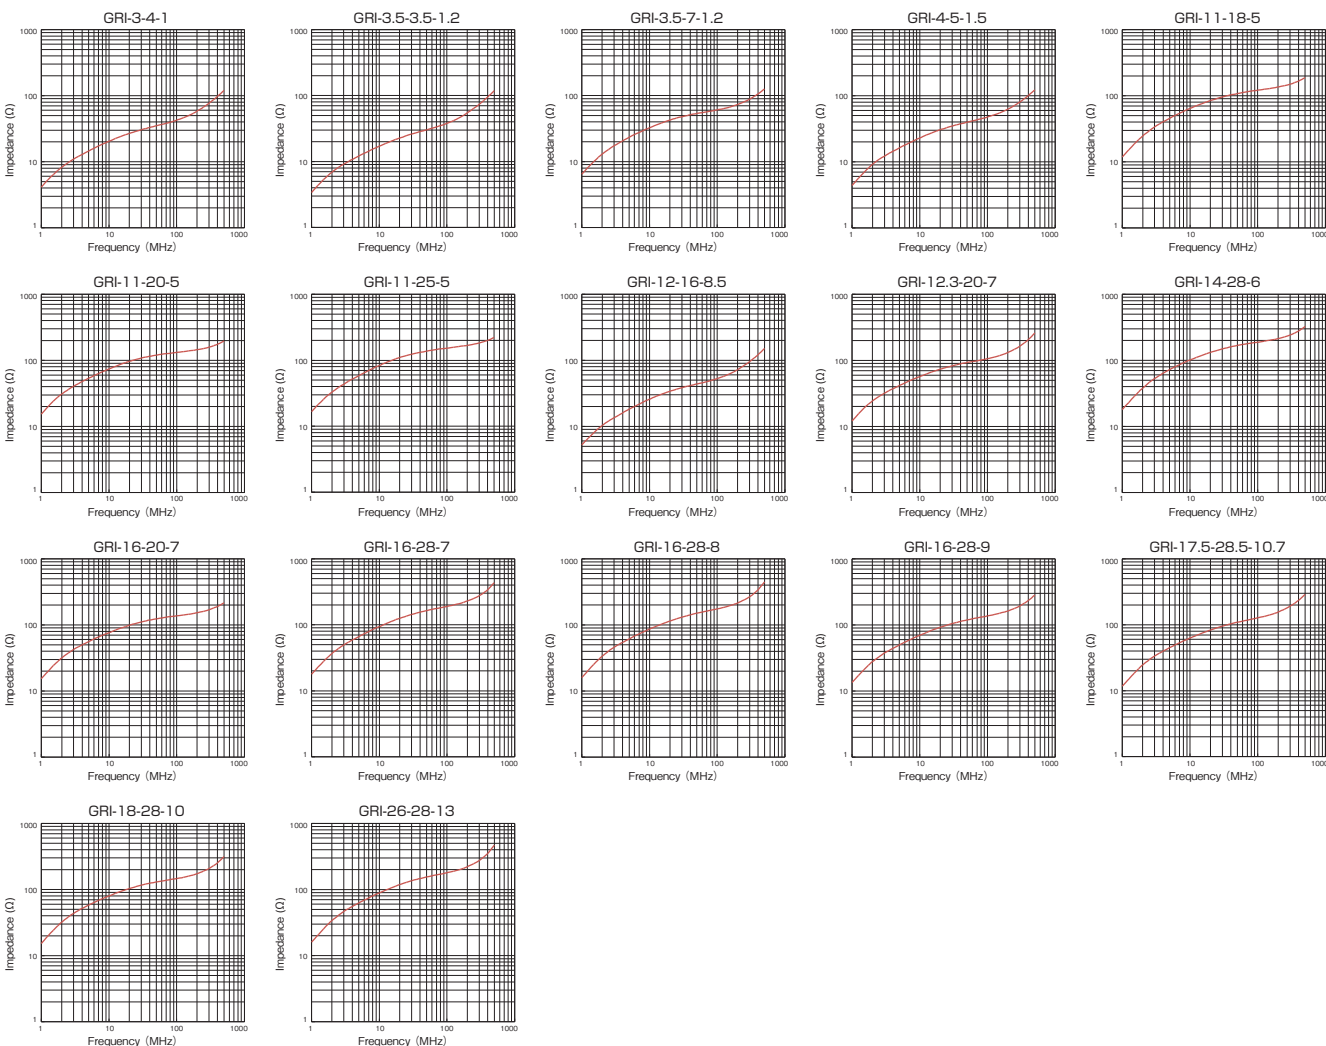

※参考実測データ/保証値ではありません。

※The values are measured data for reference, not guaranteed.